




Technical Data Sheet

PRS SlimCat™ Shielded RJ45 Crimp Connector

Makes installation easier

The Kordz PRS SlimCat™ Shielded RJ45 Crimp Connector is designed specifically for use with the Kordz PRS SlimCat™ Cat6A Network Cable. The crimp connector builds on the success of the PRO and PRS patch cords by allowing integrators to terminate their own SlimCat™ cables to length. The connector features an innovative composite construction incorporating a shielded transparent body for termination ease with a durable 'snap-proof' nylon latch. The wire manager is tinted grey for handling ease and insertion verification. The optional PRO SlimCat Strain Relief is compatible with the connector and features a removable locking pin to reduce the chance of any accidental RJ45 connector disconnects. Termination can be achieved using the Kordz One Series Crimping Tool. This connector is rated for PoE++ at 100W along with the rest of the SlimCat™ range. Match with other Kordz PRS SlimCat™ Cat6A components for a complete Kordz ecosystem that delivers 'Connectivity Assured'.

- Enables delivery of ANSI/TIA-56A8.2-D Cat6A performance up to 50m when paired with Kordz PRS SlimCat™ Cat6A Network Cables
- Durable 'snap-proof' nylon latch
- Nickel-plated metal shielding
- Transparent polycarbonate body for termination ease
- Tinted wire-manager for handling ease and insertion verification
- Optional PRO strain relief available featuring a removable locking pin
- IEEE802.3bt 100W PoE++ capable
- UL94 V-0 fire-rated
- Eco-friendly packaging
- Lifetime warranty

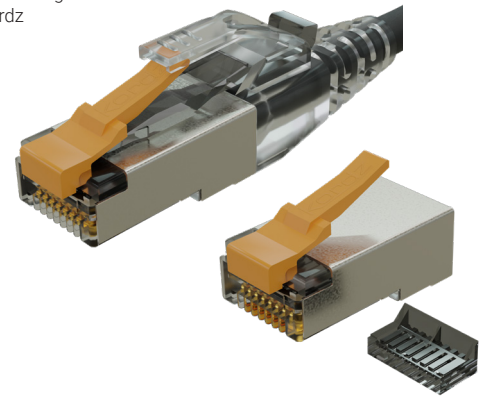

Technical Specifications	
General Specifications	
Guaranteed Performance Category	Category 6A
Applicable Performance Standards	ANSI/TIA-56A8.2-D
Power over Ethernet Performance	IEEE 802.3bt PoE++ (max 100W)
Power over Ethernet Tested Standards	IEC 60512-99-002
Shielding Type	Shielded
Shielding Material	Brass with nickel plating
Wiring method	T568A T568B
Dimensions	
Body Length	22.50mm 0.89in
Body Width	11.65mm 0.46in
Body Height	6.6mm 0.26in
Mechanical	
Housing material	Polycarbonate
Flammability Rating	UL 94 V-0
Housing Colour	Transparent
Contact Type	3 Prongs, Solid / Stranded
Gold Plating	50µ"
Liner	Included

Part No	Packaging Qty	Master Ctn Qty	Master Ctn Dims
T3R58M-6A2S-CL	100 pcs	20 boxes	588(L)*298(W)*275(H)
T2R58S-C62U-CL	100 pcs	20 boxes	588(L)*298(W)*275(H)